



Refill Instructions

Brother LC980 & LC1100

Note : The Brother original cartridge is very difficult to refill so we suggest you buy a compatible cartridge and then refill that. These instructions are for an Inkrite cartridge

Brother DCP-145c, DCP-165c, DCP-385c, DCP-585cw
DCP-6690cw, MFC-5490cn, MFC-5890cn
MFC-6490cw, MFC-5890cn, MFC-6490cw

Items Required

Inkrite Brother LC-980 or LC-1100 Cartridge,
Drill, Syringe, Filling Tube, Newspaper, sticky tape, plug & Ink

Instructions

1. Remove the label from the side of the cartridge so you can see the internal structure (fig.1)
2. Drill a hole in the top corner of the cartridge as shown in fig.2
3. Assemble syringe and steel filling tube and fill with appropriate colour ink.
4. Insert the steel filling tube into the filling hole. (See fig.3 for an exact location).
6. SLOWLY Inject ink. Hold the cartridge at an angle so the ink flows into the cartridge. Stop filling as you get close to the top of the cartridge.

IMPORTANT: Clean syringe with water and dry before refilling next colour.

7. After refilling use a plug to seal the hole in the cartridge. Try to get as tight a fit as possible.

IMPORTANT: If you do not get a tight fit then ink can leak out of the cartridge at that point while moving it. Please be careful.

8. Carefully install the cartridge into the printer.
9. Install cartridge and run a priming cycle.

For more info go to help.jrinkjet.co.uk

The refill method for the LC61, LC65, LC980, LC1100 is identical



fig.1

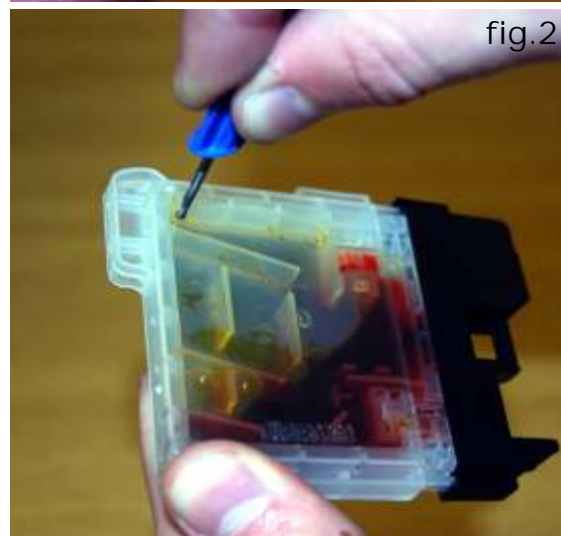


fig.2

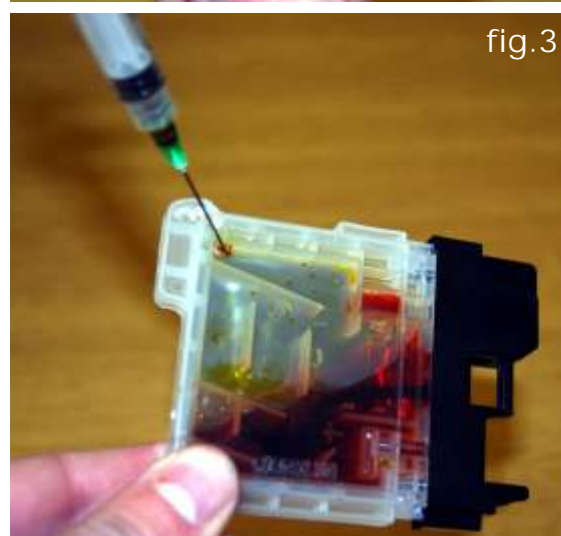


fig.3



fig.4